

SPB 35

Separate placing boom



Horizontal reach 34.65 m / 114 ft
Free standing height max. 16 m / 52 ft (without counterweight)
Picking weight max. 4,400 kg / 9,700 lb




RECORD BREAKING ENGINEERING

SPB 35 Separate placing boom

Technical data

Designation	SPB 35	
Boom	35 R	
Delivery line	DN 125	
Length of end hose	m	4.00
Horizontal reach	m	34.65
Vertical reach	m	35.00
Reach depth	m	30.00
Number of boom sections	4	
Slewing range	530°	
free standing height max. (without / with counterweight)	m	16.00 / 22.00
max. component weight (picking weight)	kg / lb	4,400 / 9,700
Total weight (without counter-jib, without mast sections)	kg / lb	8,600 / 18,960
Drive unit power	kW	30 (50 Hz) / 36 (60 Hz)

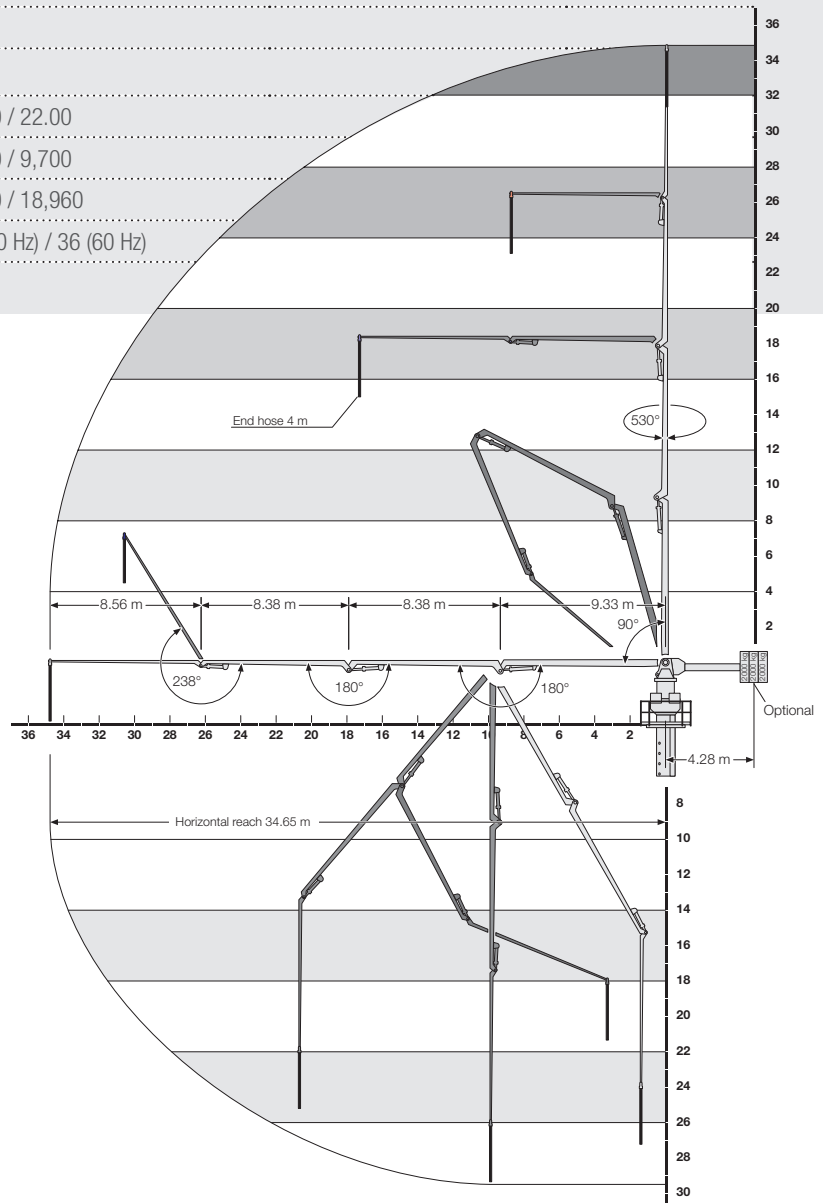

Separate placing booms from SCHWING.
Outstanding reliability and safety.



SCHWING
Stetter

SCHWING GmbH
Heerstrasse 9-27 · 44653 Herne, Germany
Fon +49 23 25 - 987-0 · Fax +49 23 25 - 72922
www.schwing-stetter.com · info@schwing.de

Stetter GmbH
Dr.-Karl-Lenz-Strasse 70 · 87700 Memmingen, Germany
Fon +49 83 31 - 78-0 · Fax +49 83 31 - 78 275
www.schwing-stetter.com · info@stetter.de